



**ELECTROMAGNETIC FLOWMETER**

**Patent number:** JP58213215  
**Publication date:** 1983-12-12  
**Inventor:** MATSUMOTO RIYOUICHIROU; ISHIKAWA SAKAE;  
WATANABE HIROSHI; KURODA MASATO; AKANO  
SHINICHI; GOTOU TSUTOMU  
**Applicant:** YAMATAKE HONEYWELL CO LTD  
**Classification:**  
- international: G01F1/58  
- european: G01F1/58C  
**Application number:** JP19820095872 19820604  
**Priority number(s):** JP19820095872 19820604

Report a data error h

**Abstract of JP58213215**

**PURPOSE:**To secure the most effective magnetic field always in spite of the variation of flowing velocity, by burying a magnetic material forming a prescribed magnetic flux distribution on an insulating layer of an inner wall of a measuring pipe. **CONSTITUTION:**A magnetic flowmeter is provided on the way to a main pipe flowing a fluid to be measured and an insulating lining 2 is coated on the inside of a measuring pipe 1. A pair of exciting coils 3 wound around a wire in a saddle frame shape is attached facing each other to the inner circumference face of the pipe 1 with a core and a mount enveloping in the coils 3. Further, a pair of electrodes 4 is inserted into the central part of an axis direction of the pipe 1 facing each other at the position where the water flowing is crossed at right angles to the direction of a magnetic flux 5 formed by the coil 3 in a condition insulating from the pipe 1. A pair of steel plates 6 formed its section in a half circular arc by the steel as a magnetic material is buried by forming monolithically with the lining 2 which is faced each to the position crossing at right angles to the magnetic flux 5 of the coil 3 in the lining 2.

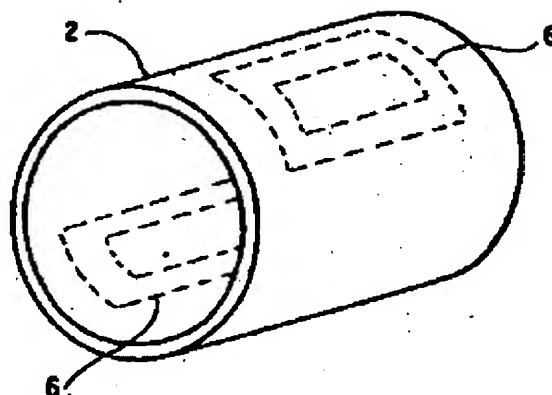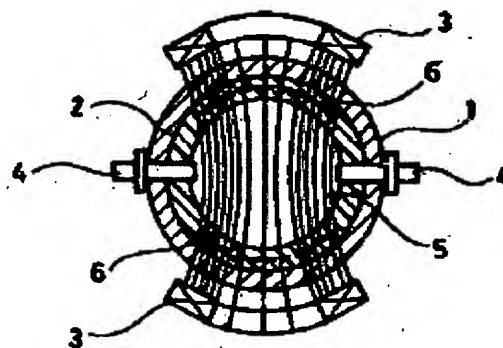

Data supplied from the esp@cenet database - Worldwide